



PRODUCT DATASHEET

Racks, Cabinets & Power

PDU 8-Way Euro Socket

8 Ways

Schuko


16 A

1U 19"

DS-04 · PAGE 1 / 2



Euro Socket (Type F)

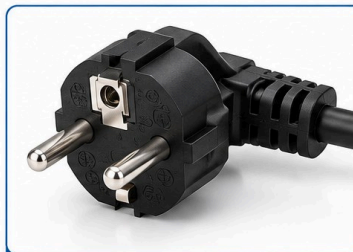

Schuko Plug (Type F)



Rack Mount (1U)

8 × EURO (TYPE F) SOCKETS · SCHUKO PLUG · 1U RACK MOUNT

The **ISHCO** 8-way rack PDU distributes mains power to equipment inside 19-inch cabinets. It features **8 Euro (Schuko, Type F) sockets** in a rugged black steel 1U enclosure with a Schuko plug on a 2 m power cord.

Rear and front mounting flanges allow horizontal installation in any standard 19-inch rack. Each socket has child-safety shutters and earthing clips, and the unit is rated for 16 A / 250 V continuous load.

1U

19-inch

8 × Type F

16 A

250 V

Steel

Features & Benefits

01

- ✓ 8 × Euro / Schuko (CEE 7/3, Type F) outlets with earthing clips
- ✓ 1U 19-inch rack mount, horizontal installation
- ✓ Schuko (CEE 7/7) plug on 2 m H05VV-F 3G1.5 mm² cord
- ✓ 45° / straight socket layout allows angled power adaptors
- ✓ Optional versions with switch, overload protection or surge available
- ✓ 16 A / 250 V AC rating – up to 3,680 W total load
- ✓ Heavy-gauge steel housing, black powder-coat finish
- ✓ Child-safety shutters on every socket
- ✓ Internal copper busbar for low resistance and cool operation
- ✓ CE marked · RoHS compliant



WEBSITE

www.ishco.uk



PHONE

+964 07501144051 · +964 07501144052



EMAIL

info@ishco.uk



LOCATION

Erbil, Sultan Muthafar

SCAN TO VISIT





PDU 8-Way Euro Socket

RACKS, CABINETS & POWER

Specifications

Ordering Guide

DS-04 · PAGE 2 / 2

Technical Specifications

02

Parameter	Specification
Outlets	8 × Schuko CEE 7/3 (Type F)
Input plug	Schuko CEE 7/7, 16 A
Rated voltage	220 – 250 V AC, 50/60 Hz
Rated current	16 A
Maximum load	3,680 W @ 230 V
Cord	2 m, H05VV-F 3G1.5 mm ²
Form factor	1U 19-inch (482.6 mm) rack mount
Dimensions (W×D×H)	482 × 44 × 44 mm (approx.)
Housing	Cold-rolled steel, black powder coat
Socket material	Flame-retardant PC / ABS, brass contacts
Protection	Optional: switch, overload breaker, surge
Operating temperature	0 °C to +40 °C
Weight	≈ 1.2 kg

Ordering Information

03

Part No.	Description	Outlets	Rating
ISH-PDU-8EU	1U 19" PDU, 8-way Euro Schuko, 2 m cord	8 × Type F	16 A / 250 V
ISH-PDU-8EU-SW	1U 19" PDU, 8-way Euro Schuko with illuminated switch	8 × Type F	16 A / 250 V

• APPLICATIONS

- Power distribution in network and server cabinets
- Wall-mount and floor-standing racks
- Telecom and CCTV equipment rooms
- AV and lab equipment racks

• STANDARDS & COMPLIANCE

- IEC 60884-1 / DIN VDE 0620
- CEE 7/3 – CEE 7/7 (Schuko)
- IEC 60297 (19-inch rack)
- CE · RoHS

• PACKAGE CONTENTS

- 1 × 8-way PDU with 2 m cord
- 4 × M6 cage nuts and screws
- User guide

Note: Specifications are typical values and may be improved without notice. For custom lengths, colours, quantities or OEM requirements please contact the iSHCO team using the details below.



WEBSITE

www.ishco.uk

PHONE

+964 07501144051 · +964 07501144052



EMAIL

info@ishco.uk

LOCATION

Erbil, Sultan Muthafar

SCAN TO VISIT

